

# THE INVENTORS OF RECYCLED RUBBER HAVE A LOCK ON PRECISION-FIT SPORTS AND FITNESS FLOORING.

## AKTIVLOK.

### ENDURING THE RIGORS, WITH INTERLOCKING, SEAMLESS STYLE.

Regupol Aktiv™ sports and fitness roll flooring is also available in interlocking tiles. Regupol AktivLok tiles interlock with a fit so precise, its seams are virtually invisible. Like Regupol Aktiv, AktivLok goes well beyond “fitness for purpose” in the selectorized area, the spinning room, the “iron den”— every space in the facility.

### PERFORMANCE. MEASURED IN MILES.

Thousands of miles of AktivLok have been manufactured using state-of-the-science equipment, the cleanest raw materials, and the most consistent color infusion. You get toughness, resiliency, shock absorption, durability, safety and great looks. That's overall performance only the inventor can offer.

### LOOSE-LAID FOR EASY INSTALLATION AND “NON-PERMANENT” PERMANENCE.

AktivLok can be loose-laid over almost any sub-floor or finished floor, without permanent bonding to the substrate. But, make no mistake about it, AktivLok stays put until you're ready to remove it or relay it. Plus, because it's made of up to 100% post-consumer tire rubber and post-industrial EPDM rubber to the strictest environmental standards, using AktivLok can qualify your facility for LEED credits.



**REGUPOL® AKTIVLOK™**  
INTERLOCKING SPORTS & FITNESS SURFACES



**DESIGN FLEXIBILITY IS LOCKED IN.**

Regupol AktivLok can be used to create an entire fitness floor in virtually any creative, attractive pattern you can imagine. Or use it in combination with Regupol Aktiv roll flooring as a border or other accent treatment.

**DO IT YOURSELF.**

Save by installing Regupol AktivLok yourself. It can be loose-laid and border, center and corner interlocking tiles fit together easily for a seamless look.


**REGUPOL AKTIVLOK INTERLOCKING TILES**  
 Dimensions: 24" x 24" x 3/8"  
 Available in corner, border and center tiles.

---

**PRODUCT SPECIFICATIONS**


Density	ASTM D3676	60 pcf
Hardness	ASTM D2240 (Shore A)	60 +/-5
Tear Strength	ASTM D624	80 pli min
Elongation	ASTM D412	>145%
Tensile Strength	ASTM D412	>220 PSI
Flexibility	ASTM F137 1/4" Mandrel	Pass
Resistance To Chemicals	ASTM F925	No change

**10000 SERIES**

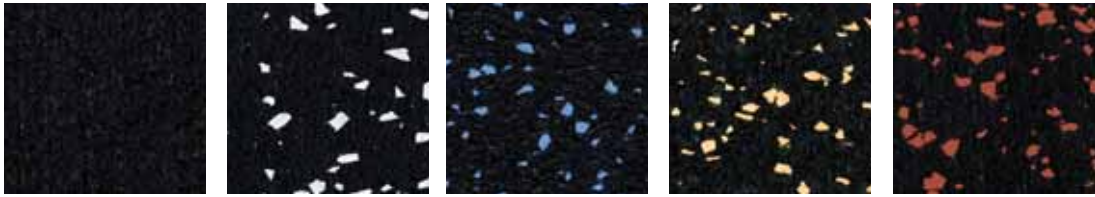

**AL10100** Jet Black      **AL10101** Gray Hound      **AL10102** Jayz Blue      **AL10104** Titan Tan      **AL10105** Firestorm Red

Additional colors available upon request. Minimums apply.

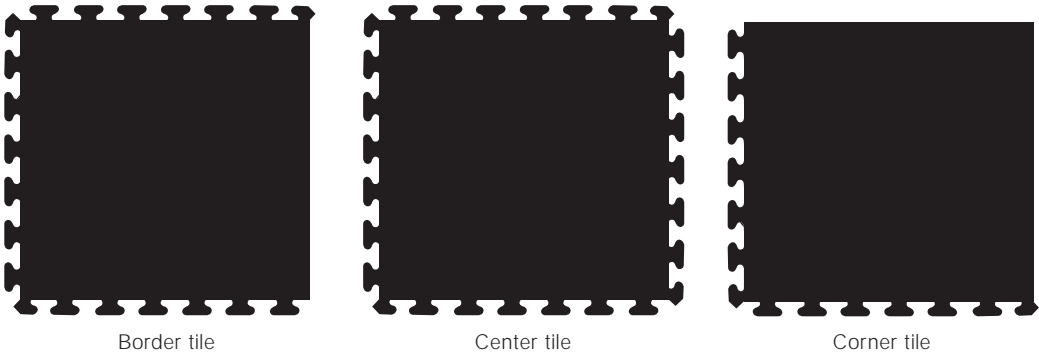

33 KEYSTONE DRIVE ■ LEBANON, PA 17042 ■ P: 1-800-537-8737 ■ F: 717-675-2199  
[www.regupol.com](http://www.regupol.com)

