

TASKI swingo 1250 B

TASKI swingo 1250B brings you:

- Unbeatable Cleaning Performance
- Increased Productivity and Manoeuvrability
- Excellent Ergonomics
- Simplicity and easy Maintenance



Performance

The patented brush design follows the floor profile and delivers nearly even pressure allocation along the full working width. This results in excellent soil removal. The U-shaped squeegee allows excellent water pick-up along the full working width. Special squeegee blades and a direct suction design allow pick-up of small debris (e.g. cigarette butts) without clogging.

Productivity and Manoeuvrability

Increased battery capacity coupled with a larger tank and the patented CSD system radically increases productivity. The dual-axle system ensures easy handling and allows excellent manoeuvrability in confined areas.

Ergonomics

The ergonomic handle suits all operators. All functions of the machine can be operated from the working position.

Battery powered automatic scrubber drier for floor cleaning

The dashboard is self explanatory with minimum training needed and displays all required information.

Maintenance

Colour coded maintenance points increase efficiency and reduce the need for training. Fewer parts to maintain and easy accessibility make the machine extremely service friendly.

Technical Data

Theoretical performance	2475 m ² /h
Working width	55 cm
Squeegee width	75 cm
Solution tank (nominal)	52 l
Recovery tank (nominal)	50 l
Normal consumption	1000 W
Rated voltage	24 V
Battery capacity	100 - 140 Ah/C5
Battery autonomy (nominal)	3.5 h
Machine weight ready for use	240 kg
Dimensions (L x W x H)	1332x490x1153 mm
Turning circle	1.33 m
Brush system	2 x 28 cm
Brush pressure	46 kg
Cleaning speed / transportation speed	4.5 / 5.3 km/h
Cable length of integrated battery charger	2.5 m
Sound level	58 dB(A)
Splash water protection	IPX3
Electrical protection class	-
Approvals	TÜV, ÖVE



TASKI swingo 1250 B is available in the following versions

Model	Power	Power BMS	Power EBU	Power BMS
Article number				
Battery Management System (BMS)		X		X
Wheel Drive (WD+CSD)	X	X	X	X
Electric Brush Unit (EBU)			X	X

Accessories / Additional Parts

Accessories	Article number
Pad drive harpoon grip 28 cm	7510634
Scrubbing brush standard 28 cm	7510631
Scrubbing brush washed concrete 28 cm	7510632
Scrubbing brush abrasive 28 cm	7510633
Filling hose with universal water coupling	8502830
Additional Parts	Article number
Polyurethane traction wheel, brown	1760510
Set of 2 polyurethane traction wheels green (supergrip)	1760650


Description of Features

BMS: Battery Management System: The battery charger which is integrated in the machine, prevents deep discharging of the battery and monitors the charging process.

WD: Wheel Drive: The variable working speed (up to 4.5km/h) and reverse speed (up to 2.5km/h) guarantees ergonomic and effortless working and increases the performance compared to non-wheel drive models.

CSD: Cleaning Solution Dosing: With the patented CSD system, exactly the right amount of cleaning solution is dosed onto the floor depending on how fast the machine is going. The slower you go (e.g. around corners) the less is dosed. The result is no puddles around corners, a 30-50% saving in cleaning solution and significantly increased productivity of the machine.

EBU: Electrical Brush Unit: The brush unit can be lifted and lowered at the touch of a button. This allows fast and effortless brush changing - even for inexperienced users.

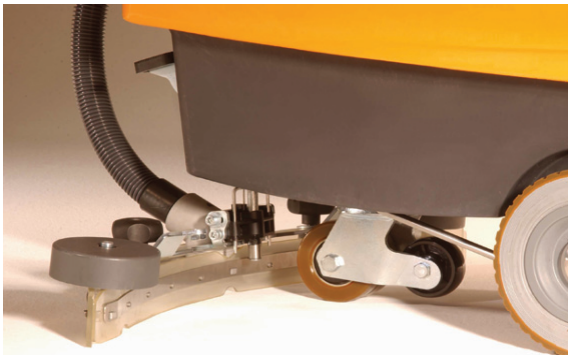

JohnsonDiversey
 Eschlikonerstrasse
 CH-9542 Muenchwilten
 Switzerland
 Ph. +41-71-969 2727
 Fax. +41-71-969 2253
 www.johnsondiversey.com

JohnsonDiversey 
 Clean is just the beginning