
SPORT IMPACT

WEIGHT AND SKATE RESISTANT RUBBER FLOORING



SPORT IMPACT CSCC. HRSA. YNIRSA.



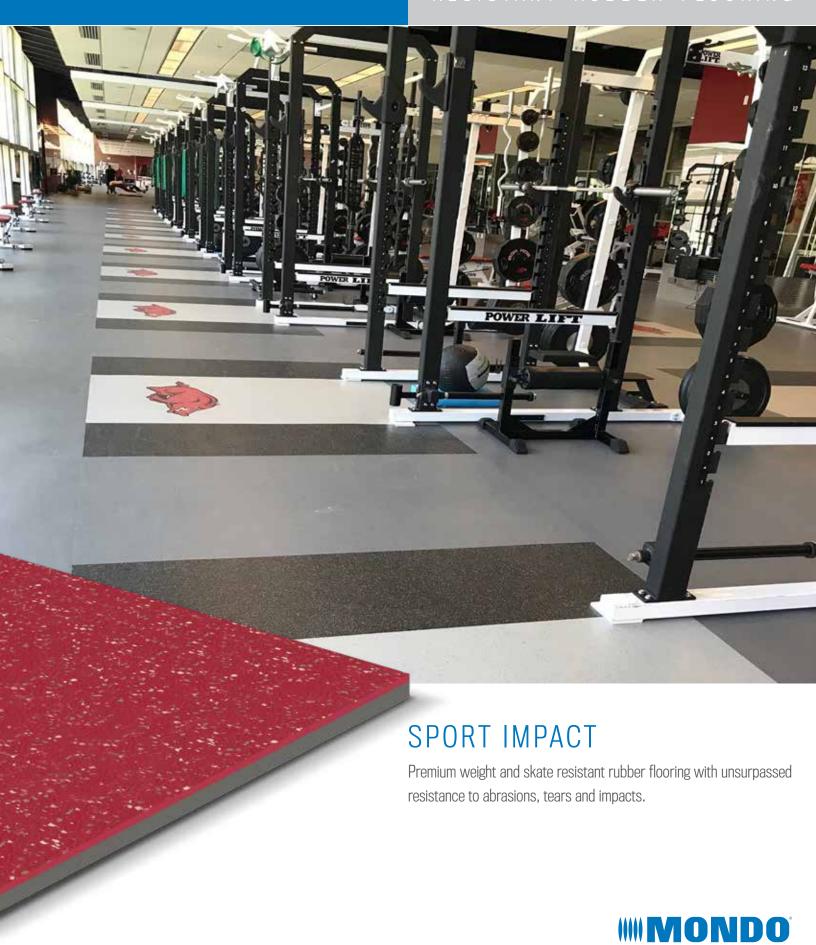





SPECIFICATIONS

Sealskin Texture: Thickness: 15/64" (6 mm) Roll Width: 6'1" (1.86 m) 42' 7" (13 m)* Roll Length:

Thickness: 25/64" (10 mm) 6' 1" (1.86 m) Roll Width: 29' 6" (9 m)* Roll Length:

Tile Dimensions: 3' x 3'

 $(0.91 \text{ m} \times 0.91 \text{ m})$

Brown

136

Purple

026

Green

Dark Blue

073

COLORS**



Sand 062



Red 141



Orange



Blue 110



Gold



Dark Grey 018



Medium Grey

Black 008

rinted in Canada ∙ Revised 02/2020

VIII CANIZED ADVANTAGE

Mondo's vulcanization process permanently amalgamates individual layers, using high heat and pressure; the product will never separate, and its biomechanical and physical properties will be consistent. Each vulcanized layer offers individual characteristics and benefits.

PERFORMANCE LAYER

- 3 mm homogeneous wear layer for high performance under heavy use, traffic from ice skate blades, as well as strength and conditioning equipment
- · Straightforward maintenance, requires no finishes or coatings

KFY BENEFITS

- 20+ years life expectancy
- · Low cost of ownership

HEALTH AND SAFETY

- · GREENGUARD Gold certified, the most stringent indoor air quality requirement testing
- · 100% recyclable; contains pre-consumer, postconsumer recycled content and rapidly renewable material
- Fire resistant
- Meets ADA requirements





IMPACT I AYFR

- · Protects against heavy impact and high intensity training
- Glued down installation eliminates bacteria or mold growth
- Provides shock absorption and dimensional stability
- · Withstands static loads such as weights and cardio equipment
- · Free of halogens, isocyanates, formaldehyde, asbestos, bisphenol (BPA), halogenated flame retardant-free, heavy metals, phthalates, polychlorinated biphenyls (PCBS), perfluorinated compounds (PFCS)
- Excellent fungal, bacterial and microbial resistance throughout





^{*}Average length from production