
SUPER X PERFORMANCE

OUTDOOR & INDOOR RUNNING TRACK



SUPER X PERFORMANCE



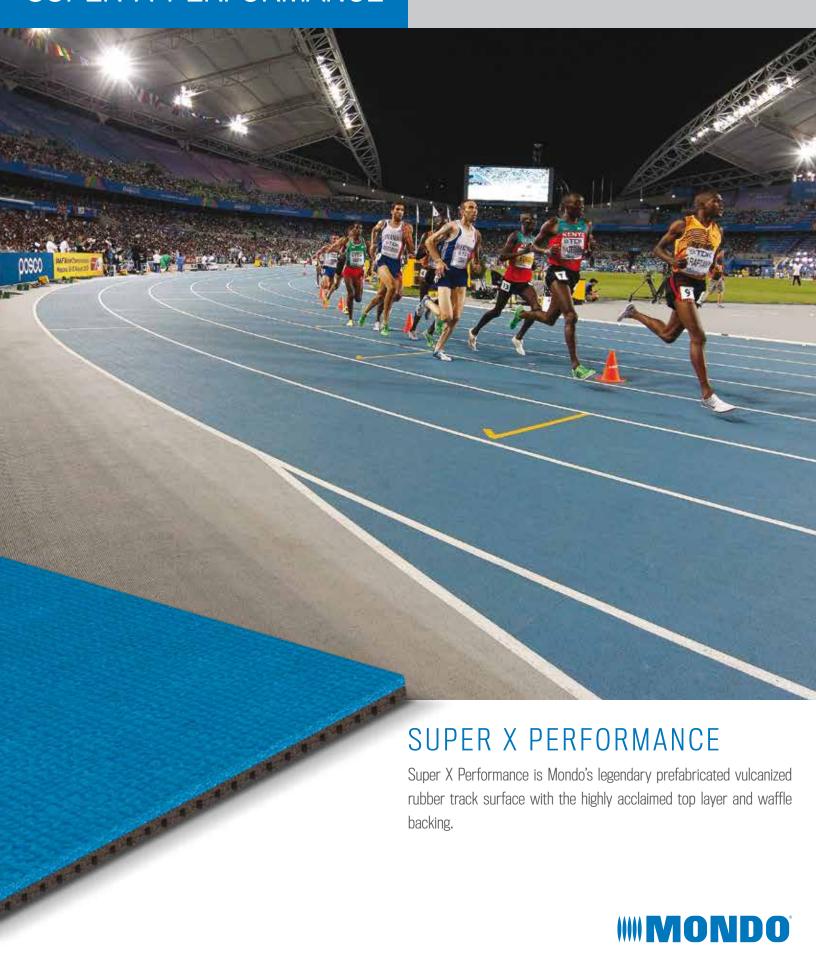



SPECIFICATIONS

Texture:	Super X Performance Embossing
Thickness:	15/64" (6 mm) 5/16" (8 mm)
Roll Width:	4' 0" - 6' 0" (1.22 m - 1.83 m)
Roll Length:	49' 2" (15 m)*

Thickness: 25/64" (10 mm) 15/32" (12 mm) 17/32" (13.5 mm)

Roll Width: 3' 0" - 5' 6" (0.92 m - 1.70 m)

Roll Length: 49' 2" (15 m)*

KEY BENEFITS

- · Highly durable; withstands static and rolling loads
- Embossed for superior traction indoors and outdoors
- · Shock absorption layer for safety and comfort
- · Stain resistant; no specialized maintenance needed
- · Non-slip surface for ease in maneuvering wheelchairs in comparison to other synthetic surfaces.
- · Designed to channel water away for high performance in all conditions

EXPERIENCE

Mondo's proprietary equipment and vulcanization process ensure that biomechanical and physical properties are consistent.

HEALTH AND SAFETY

- · GREENGUARD GOLD certified for better indoor air quality
- · 100% recyclable
- · Meets ADA requirements

- · Contributes toward LEED points
- · Granular-free for healthy waterways
- · Heavy metals free and will not leach into the environment
- · Excellent bacterial, microbial and fungal resistance properties













Red P30



Cognac P58



Green P10



Dark Green P14




Medium Blue P18



Light Blue P85





Dark Grey P06